

# Heatcraft Coil Certified Drawing

## BOOSTER CP 1069-G

Customer \_\_\_\_\_ Customer P.O. Number \_\_\_\_\_

Job \_\_\_\_\_

Written by \_\_\_\_\_ Date \_\_\_\_\_

Approved by \_\_\_\_\_ Date \_\_\_\_\_



#	TAG	QTY	MODEL NUMBER						FIG#	CASING
			TYPE	FPI	ROWS DEEP	FIN	FH	FL		
1										
2										
3										
4										

#	DIMENSIONAL DATA												
	CONNECTION				H	I	L	M	FLANGES				W
	SIZE	A	C	E					R	S1	S2	T	
1													
2													
3													
4													

MATERIALS OF CONSTRUCTION	
FINS	AL CU CS St Stl
TUBES	CU CuNi CS St Stl

MATERIALS OF CONSTRUCTION	
CONN	Cu Sweat CS St Stl Wrot Cu
CASING	AL Galvanized Steel CU Stainless Steel

CONN. OPTIONS	
<input type="checkbox"/>	FPT
<input type="checkbox"/>	0.75"
<input type="checkbox"/>	1"

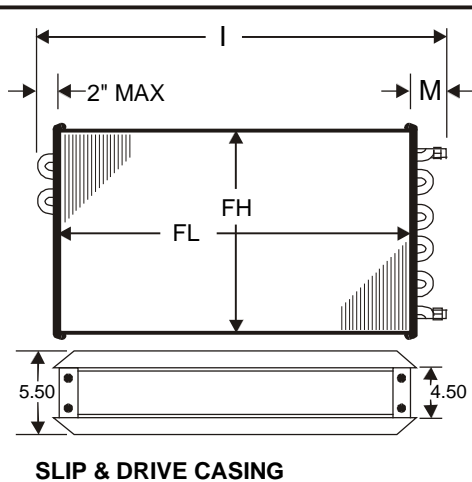
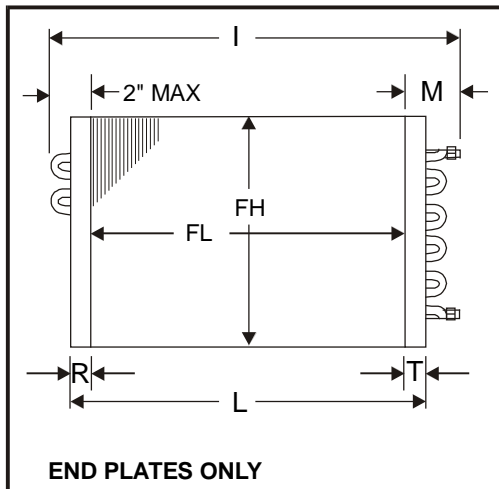


GENERAL OPTIONS	
<input type="checkbox"/>	Label Kit
<input type="checkbox"/>	Mounting Holes
<input type="checkbox"/>	Corrosion Resistant Coating
<input type="checkbox"/>	0.125" Dole Vent & Drain

**REMARKS:**

**GENERAL NOTES**

1. Mounting holes are optional for Fully Flanged and End Plates Only. 0.375" diameter holes on 6" centers from the centerline of the fin height and finned length are typical for all flanges. Not available when S < 0.75".
2. All dimensions are in inches.
3. The water should enter the coil through the lower connection for proper fluid flow.
4. Intermediate tube supports are fabricated from heavy gauge stock and supplied per the chart below.

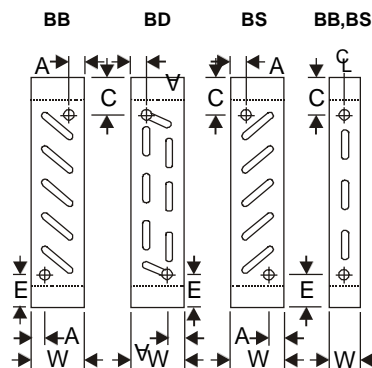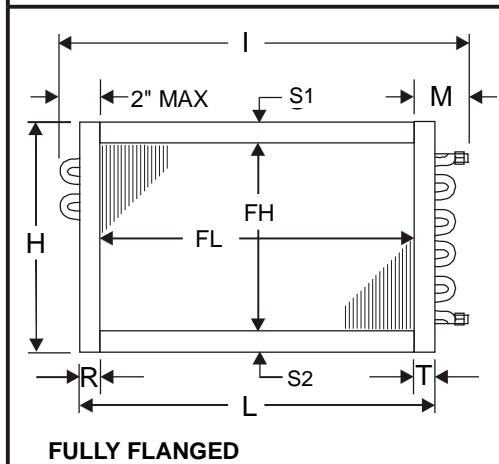

Finned Length (FL)	Tube Supports
≤ 48	0
> 48 ≤ 96	1