

HEATCRAFT CERTIFIED DRAWING

Customer:  
 Contact:  
 Telephone:  
 Cell:  
 Fax:  
 Job:

Date:  
 From:  
 Company:  
 Return Tel:  
 Return Fax:  
 Email:


| ITEM | QTY | MODEL NUMBER |     |      |     |         |         | HAND  |
|------|-----|--------------|-----|------|-----|---------|---------|-------|
|      |     | TYPE         | FPI | ROWS | FIN | FH (IN) | FL (IN) |       |
| 1    |     |              |     |      |     |         |         | Right |
| 2    |     |              |     |      |     |         |         |       |

| Materials of Construction |  | Options        |                    |                     |    |
|---------------------------|--|----------------|--------------------|---------------------|----|
| Fin                       |  | Coating        | None               | Turbospirals        | No |
| Tube*                     |  | Casing Type    | Flanged            | Moisture Eliminator | No |
| Casing                    |  | Vent & Drain   | .50 FPT on End Cap | Mounting Holes      | No |
| Conn. Material            |  | Plate Material | Carbon Steel       | Label Kit           | No |

\*Moducoils are only available in 1/2" and 5/8"

| Dimensional Data |      |   |   |   |   |   |   |   |   |    |   |   |    |    |   |   |
|------------------|------|---|---|---|---|---|---|---|---|----|---|---|----|----|---|---|
| #                | SIZE | A | B | C | E | H | I | J | L | L1 | M | R | S1 | S2 | T | W |
| 1                |      |   |   |   |   |   |   |   |   |    |   |   |    |    |   |   |
| 2                |      |   |   |   |   |   |   |   |   |    |   |   |    |    |   |   |

Note: S1 & S2 min = 1.50  
 W Dim consult factory

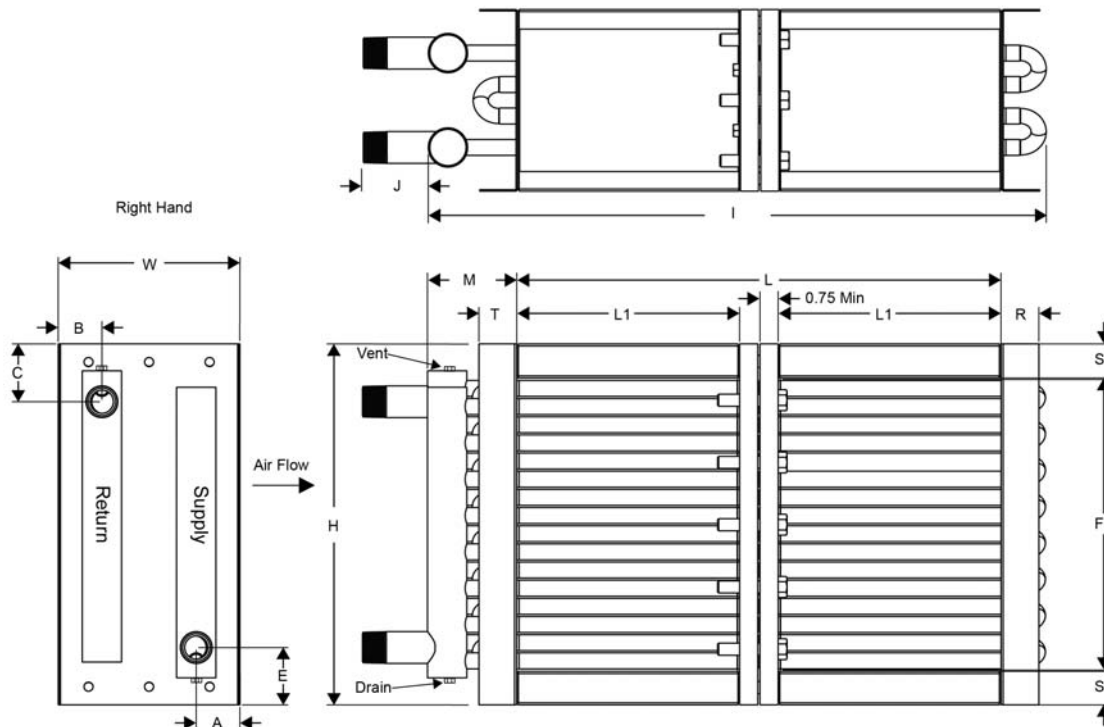

1. All dimensions are in inches.
2. Manually verifying dimensions is highly recommended.
3. Intermediate tube supports fabricated from stock of the same material as the casing will be provided.
4. The supply line should be connected to the lower connection on the leaving air side for counter flow operation.
5. Minimum allowed for the tube plate is 0.75 inches.
6. Maximum operating pressure is 250 psig.
7. Maximum fluid temperature is 200°F.

Copyright 2003 Modine Grenada LLC Confidential and Proprietary. This design is for the exclusive and confidential use of Modine Grenada LLC and its client. Any duplication made for the purpose of disclosing this design or any part of the design to a competitor of Modine Grenada LLC is in direct violation of this confidentiality. Any duplication must be approved in writing by Modine Grenada LLC.